


PRODUCT-DETAILS

463ERT11

Socket outlet for wall mounting, IP44, 3P+N+E,
63 A, 250/440 ... 265/460 V

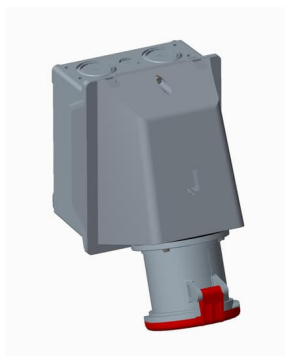

General Information

Extended Product Type	463ERT11
Product ID	2CMA101887R1000
EAN	7392696018876
Catalog Description	Socket outlet for wall mounting, IP44, 3P+N+E, 63 A, 250/440 ... 265/460 V
Long Description	Wall mounted socket, 3P+N+E, IP44, 63 A, 250/440 ... 265/460 V, Housing in plastic (PBT). Cable entry with knock-outs 2 x Ø29/37 + 1 x Ø23 on top. 1 x Ø29 + 1 x Ø 23 from bottom. Cable area 6...25 mm ²

Ordering

EAN	7392696018876
Country of Origin	Czech Republic (CZ)
Minimum Order Quantity	1 piece

Dimensions

Product Net Width	149 mm
Product Net Height	216 mm
Product Net Weight	1.45 kg

Container Information

Package Level 1 Width	225 mm
Package Level 1 Depth / Length	265 mm
Package Level 1 Height	155 mm
Package Level 1 Gross Weight	1.45 kg
Package Level 1 EAN	7392696018876
Package Level 1 Units	box 1 piece

Environmental

RoHS Status	Following EU Directive 2011/65/EU
-------------	-----------------------------------

Certificates and Declarations (Document Number)

Declaration of Conformity - CE	2CMC700005D0001
Environmental Information	2CMC000056M0000
RoHS Information	2CMC700005D0001
REACH Declaration	2CMC700005D0001

Additional Information

Additional Information	3P+N+E
Ambient Temperature	-25 ... 40 °C
Cable Cross-Section	4 ... 16 mm²
Cable Diameter	17 ... 35 mm
Cable Entry Position	2xM32/M40 + 1xM20 knock-out on top, 2xM20+1xM32/M40 knock-out from bottom
Cable Outlets Per Side	2
Color	Red
Connection Type	Screw
Degree of Protection	IP44
Frequency (f)	60 Hz
Function	Wall mounted socket
Housing Material	Thermoplastic (PBT)
Invoice Description	Ind. P&S#463ERT11
Mounting Holes	124x129
Mounting Type	Angled
Number of Poles	5
Order Multiple	1 piece
Product Main Type	ERT
Product Name	Wall mounted socket
Protection Type	Watertight
Rated Current (I_n)	63 A
Rated Voltage (U_r)	250/440 ... 265/460 V

Recommended Screw Driver	PH2
Standards	IEC 60309-1, -2
Suitable for Product Class	IEC Industrial Plugs and Sockets
Instructions and Manuals	2CMC700014C0016
RAL Number	RAL 7001 - Silver Grey

Classifications

eClass	27440510
UNSPSC	39120000

Technical

Wire Size	8 ... 4 AWG
Tightening Torque	WireClamp3.5 N·m

Categories

Low Voltage Products and Systems → Industrial Plugs and Sockets → Easy & Safe → Surface Socket Outlets

