


## PRODUCT-DETAILS

# 263ERT6

Socket outlet for wall mounting, IP44, 2P+E,  
63 A, 200 ... 250 V

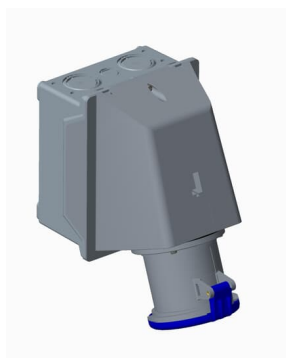

## General Information

|                       |                                                                                                                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Extended Product Type | 263ERT6                                                                                                                                                                                                    |
| Product ID            | 2CMA101895R1000                                                                                                                                                                                            |
| EAN                   | 7392696018951                                                                                                                                                                                              |
| Catalog Description   | Socket outlet for wall mounting, IP44, 2P+E, 63 A, 200 ... 250 V                                                                                                                                           |
| Long Description      | Wall mounted socket, 2P+E, IP44, 63 A, 200 ... 250 V, Housing in plastic (PBT). Cable entry with knock-outs 2 x Ø29/37 + 1 x Ø23 on top. 1 x Ø29 + 1 x Ø 23 from bottom. Cable area 6...25 mm <sup>2</sup> |

## Ordering

|                        |                     |
|------------------------|---------------------|
| E-Number (Sweden)      | 2418154             |
| EAN                    | 7392696018951       |
| Country of Origin      | Czech Republic (CZ) |
| Minimum Order Quantity | 1 piece             |

## Dimensions

|                     |            |
|---------------------|------------|
| Product Net Width   | 149 mm     |
| Product Net Height  | 214 mm     |
| Product Net Weight  | 1.4 kg     |
| Mechanical Drawings | 9IBA011094 |

## Container Information

|                                |               |
|--------------------------------|---------------|
| Package Level 1 Width          | 225 mm        |
| Package Level 1 Depth / Length | 265 mm        |
| Package Level 1 Height         | 155 mm        |
| Package Level 1 Gross Weight   | 1.4 kg        |
| Package Level 1 EAN            | 7392696018951 |
| Package Level 1 Units          | box 1 piece   |

## Environmental

|             |                                   |
|-------------|-----------------------------------|
| RoHS Status | Following EU Directive 2011/65/EU |
|-------------|-----------------------------------|

## Certificates and Declarations (Document Number)

|                                |                 |
|--------------------------------|-----------------|
| Declaration of Conformity - CE | 2CMC700005D0001 |
| Environmental Information      | 2CMC000056M0000 |
| RoHS Information               | 2CMC700005D0001 |
| REACH Declaration              | 2CMC700005D0001 |

## Additional Information

|                                 |                                                                          |
|---------------------------------|--------------------------------------------------------------------------|
| Additional Information          | 2P+E                                                                     |
| Ambient Temperature             | -25 ... 40 °C                                                            |
| Cable Cross-Section             | 4 ... 16 mm <sup>2</sup>                                                 |
| Cable Diameter                  | 17 ... 35 mm                                                             |
| Cable Entry Position            | 2xM32/M40 +1xM20 knock-out on top, 2xM20+1xM32/M40 knock-out from bottom |
| Cable Outlets Per Side          | 2                                                                        |
| Color                           | Blue                                                                     |
| Connection Type                 | Screw                                                                    |
| Degree of Protection            | IP44                                                                     |
| Frequency (f)                   | 50 Hz<br>60 Hz                                                           |
| Function                        | Wall mounted socket                                                      |
| Housing Material                | Thermoplastic (PBT)                                                      |
| Invoice Description             | Ind. P&S#263ERT6                                                         |
| Mounting Holes                  | 124x129                                                                  |
| Mounting Type                   | Angled                                                                   |
| Number of Poles                 | 3                                                                        |
| Order Multiple                  | 1 piece                                                                  |
| Product Main Type               | ERT                                                                      |
| Product Name                    | Wall mounted socket                                                      |
| Protection Type                 | Watertight                                                               |
| Rated Current (I <sub>N</sub> ) | 63 A                                                                     |
| Rated Voltage (U <sub>r</sub> ) | 200 ... 250 V                                                            |
| Recommended Screw Driver        | PH2                                                                      |
| Standards                       | IEC 60309-1, -2                                                          |
| Suitable for Product Class      | IEC Industrial Plugs and Sockets                                         |
| Instructions and Manuals        | 2CMC700014C0016                                                          |
| RAL Number                      | RAL 7001 - Silver Grey                                                   |

| Classifications |          |
|-----------------|----------|
| eClass          | 27440510 |
| UNSPSC          | 39120000 |

| Technical         |                  |
|-------------------|------------------|
| Wire Size         | 8 ... 4 AWG      |
| Tightening Torque | WireClamp3.5 N·m |

| Categories                                                                                             |
|--------------------------------------------------------------------------------------------------------|
| Low Voltage Products and Systems → Industrial Plugs and Sockets → Easy & Safe → Surface Socket Outlets |

