


PRODUCT-DETAILS

OVR T1-T2 3N 12.5-275s P TS QS

OVR T1-T2 3N 12.5-275s P TS QS Surge Protective Device

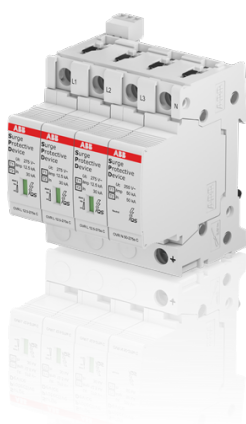

General Information

Extended Product Type	OVR T1-T2 3N 12.5-275s P TS QS
Product ID	2CTB815710R0700
EAN	3660308524928
Catalog Description	OVR T1-T2 3N 12.5-275s P TS QS Surge Protective Device
Long Description	Surge protective devices SPD type 1- type 2 protect low-voltage consumer systems against lightning currents and surge voltages as they are tested as SPD type 1 and type 2 according to IEC 61643-11. The devices are compatible with the System pro M compact series. The SPD with "TS" are optionally equipped with a auxiliary contact. The variants with "reserve varistor" (s) offer additional protection for the system, as the SPD is not completely disconnected from the mains at the end of its service life, but with an additional smaller varistor still guarantees basic protection and the system thus until the surge arrester is replaced is still protected

Technical

Standards	IEC 61643-11 / EN 61643-11
Product Name	Surge Protective Device
Type of Low Voltage Distribution System	TT TN-S
Suitable For	To protect the systems against the transient overvoltage (lightning)
Nominal AC Voltage of the System (U_o)	230 / 400 V
Voltage Rating DC	350 V

Voltage Protection Level (Up)	(L-N) 1.4 kV (N-PE) 1.4 kV (L-PE) 1.5 kV
Maximum Continuous Operating Voltage (U_c)	(L-PE) 275 V (L-L) 440 V (L-N) 275 V (N-PE) 255 V
Temporary Overvoltage Test Value (U_T)	(L-N) 337 V (N-PE) 1200 V
Discharge Current	Nominal 20 kA Maximum 80 kA Total 100 kA
Impulse Current	I (imp, 10 / 350 μ s) 12.5 kA I (total, 10 / 350 μ s) 50 kA
Lightning Impulse Current	12,5
Short Circuit Withstand I_{cc}	100 kA
Follow Current Extinction Capacity I_f (I fi)	(L-N) - kA (N-PE) 0.1 kA
Power Loss	63 mW
Short-Circuit Protective Devices	Curve B Breakers $\leq$ 125 A Curve C Breakers $\leq$ 125 A gL Type Fuses $\leq$ 160 A gG Type Fuses $\leq$ 160 A
Arrester Class	I II
Number of Poles	4
Number of Protected Poles	4
Number of Auxiliary Contacts NC	1
Number of Auxiliary Contacts NO	1
Position of Neutral Terminals	Right
Version	Plug-in
Mounting Type	DIN rail (top hat rail) 35 mm
Product Type	QS
Options Provided	Industry, commercial building
Auxiliary Circuit Load	Minimum 12Vdc - 10mA Maximum 250Vac - 1A
Preventive Maintenance Feature	Yes
Status Indicator	Yes
Fuse Size	4 modular spacing

Environmental

Degree of Protection	IP20
Maximum Operating Altitude Permissible	Without Derating 5000

Dimensions

Width in Number of	4
--------------------	---

Modular Spacings

Product Net Width	71.2 mm
Product Net Height	95.8 mm
Product Net Depth / Length	76.7 mm
Product Net Weight	0.6 kg

Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	117 mm
Package Level 1 Height	82 mm
Package Level 1 Depth / Length	77 mm
Package Level 1 Gross Weight	630 g
Package Level 1 EAN	3660308524928

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85363090
Country of Origin	Bulgaria (BG)
Selling Unit of Measure	piece

Certificates and Declarations (Document Number)

CQC Certificate	9AKK107680A1975
Declaration	2CTC432056G1701
Declaration of Conformity - CE	9AKK107992A0892
EAC Certificate	2CTC436008G1701
Instructions and Manuals	2CTC431030M1701

Popular Downloads

Data Sheet, Technical Information	2CTC431039D0201
Instructions and Manuals	2CTC431030M1701
Mechanical Drawings	2CTC800015F1200.pdf 2CTC800015F1201.dxf 2CTC800015F1202.stp 2CTC800015F1203.igs

Classifications

ETIM 6	EC001457 - Combined arrester for power supply systems
ETIM 7	EC001457 - Combined arrester for power supply systems
ETIM 8	EC001457 - Combined arrester for power supply systems
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)

WEEE B2C / B2B	Business To Business
CN8	85363090
Object Classification Code	141BCC

Categories

Low Voltage Products and Systems → Modular DIN Rail Products → Surge Protective Devices SPDs → Surge Protective Devices SPD Class I

