


PRODUCT-DETAILS

OVR T1-T2 3L 12.5-275s P QS

OVR T1-T2 3L 12.5-275s P QS Surge Protective Device

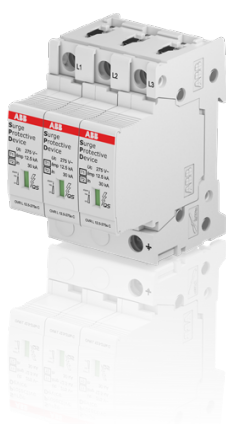

General Information

Extended Product Type	OVR T1-T2 3L 12.5-275s P QS
Product ID	2CTB815710R1800
EAN	3660308524980
Catalog Description	OVR T1-T2 3L 12.5-275s P QS Surge Protective Device
Long Description	OVR T1-T2 3L 12.5-275s P QS Surge Protective Device

Technical

Standards	IEC 61643-11 / EN 61643-11
Product Name	Surge Protective Device
Type of Low Voltage Distribution System	TN-C
Suitable For	To protect the systems against the transient overvoltage (lightning)
Nominal AC Voltage of the System (U_o)	230 / 400 V
Voltage Rating DC	350 V
Voltage Protection Level (Up)	(L-N) - kV (N-PE) - kV (L-PE) 1.4 kV
Maximum Continuous Operating Voltage (U_c)	(L-PE) 275 V (L-L) 440 V (L-N) - V

	(N-PE) - V
Temporary Overvoltage Test Value (U_T)	337 V
Discharge Current	Nominal 20 kA Maximum 80 kA Total 240 kA
Impulse Current	I (imp, 10 / 350 μ s) 12.5 kA I (total, 10 / 350 μ s) 37.5 kA
Lightning Impulse Current	12,5
Short Circuit Withstand Icc	100 kA
Follow Current Extinction Capacity If (I fi)	(L-N) - kA (N-PE) - kA
Power Loss	63 mW
Short-Circuit Protective Devices	Curve B Breakers $\leq$ 125 A Curve C Breakers $\leq$ 125 A gL Type Fuses $\leq$ 160 A gG Type Fuses $\leq$ 160 A
Arrester Class	I II
Number of Poles	3
Number of Protected Poles	3
Version	Plug-in
Mounting Type	DIN rail (top hat rail) 35 mm
Product Type	QS
Options Provided	Industry, commercial building
Preventive Maintenance Feature	Yes
Status Indicator	Yes
Fuse Size	3 modular spacing

Environmental

Degree of Protection	IP20
Maximum Operating Altitude Permissible	Without Derating 5000

Dimensions

Width in Number of Modular Spacings	3
Product Net Width	53.4 mm
Product Net Height	88 mm
Product Net Depth / Length	76.7 mm
Product Net Weight	00.45 kg

Container Information

Package Level 1 Units	1 piece
Package Level 1 Width	117 mm
Package Level 1 Height	82 mm

Package Level 1 Depth / Length	61 mm
Package Level 1 Gross Weight	475 g
Package Level 1 EAN	3660308524980

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85363090
E-Number (Finland)	3212133
Country of Origin	Bulgaria (BG)
Selling Unit of Measure	piece

Certificates and Declarations (Document Number)

CQC Certificate	9AKK107680A1975
Declaration	2CTC432056G1701
Declaration of Conformity - CE	9AKK107992A0892
EAC Certificate	2CTC436008G1701
Instructions and Manuals	2CTC431030M1701

Popular Downloads

Data Sheet, Technical Information	2CTC431045D0201
Instructions and Manuals	2CTC431030M1701
Mechanical Drawings	2CTC800015F1800.pdf 2CTC800015F1801.dxf 2CTC800015F1802.stp 2CTC800015F1803.igs

Classifications

ETIM 6	EC001457 - Combined arrester for power supply systems
ETIM 7	EC001457 - Combined arrester for power supply systems
ETIM 8	EC001457 - Combined arrester for power supply systems
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Business
CN8	85363090
Object Classification Code	141BCC

Categories

Low Voltage Products and Systems → Modular DIN Rail Products → Surge Protective Devices SPDs → Surge Protective Devices SPD Class I

