


POWERSCOUT®

Transparency for your electrical distribution systems

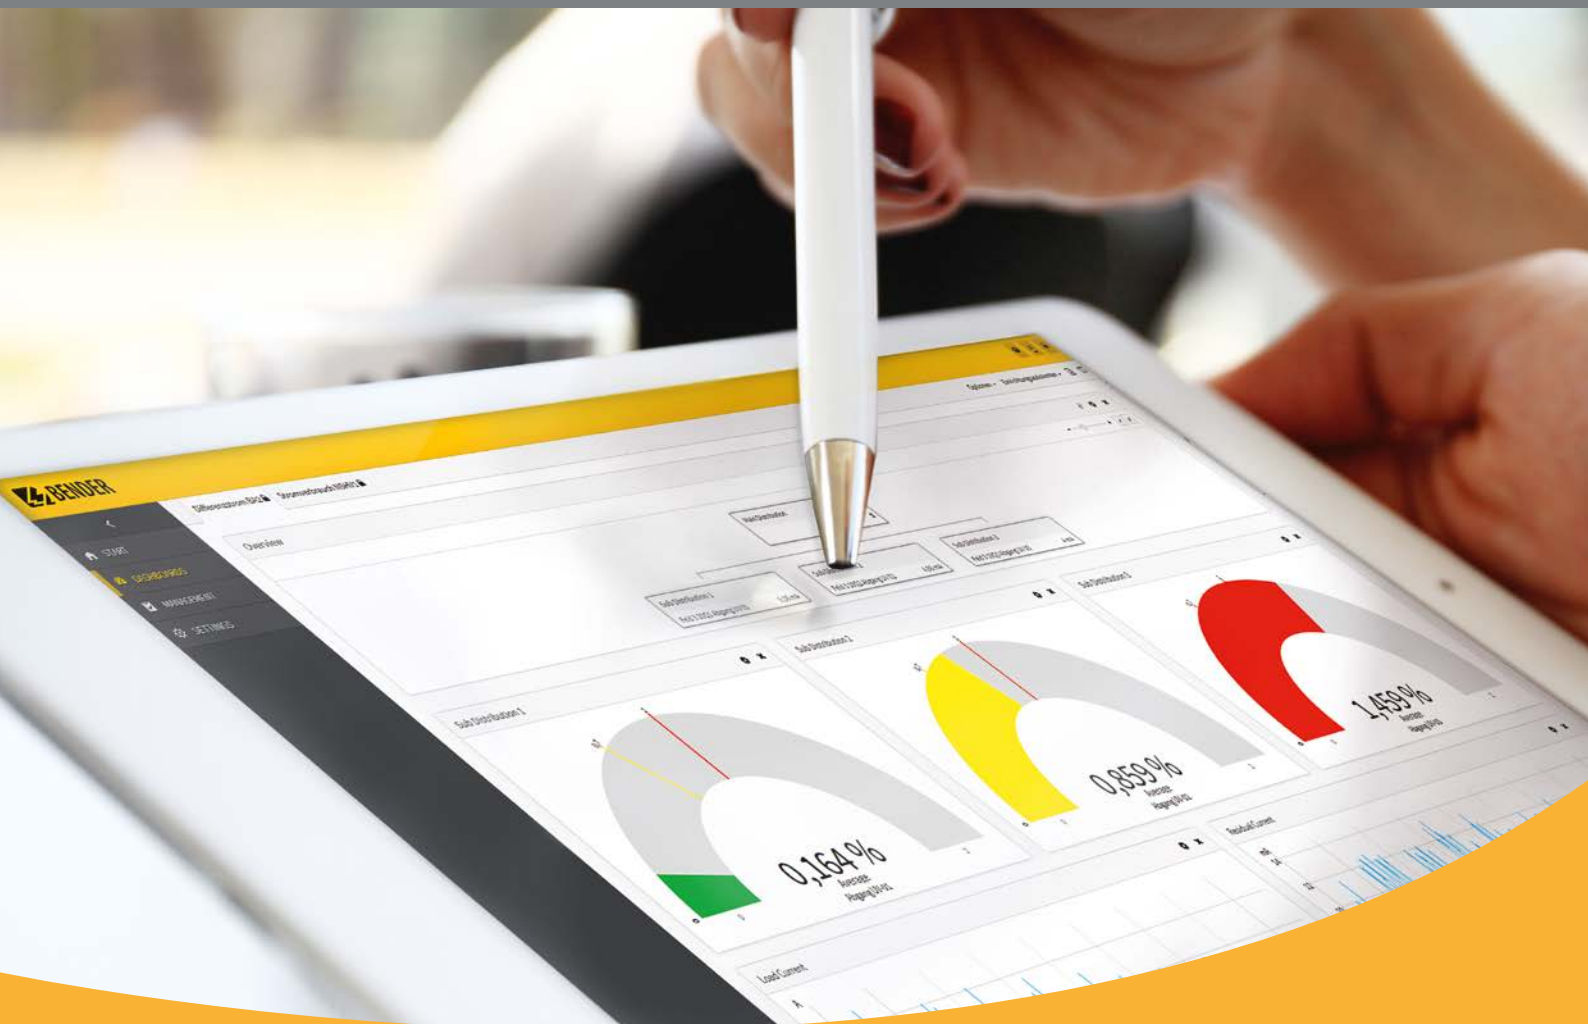

POWERSCOUT®

Time = money and both are resources that are generally in short supply. Staff shortages, ever **stricter conditions and deadlines** and the constant need to optimise are the counterparts to this simple equation.

Responsible electrically skilled persons experience this more and more. They are specialists, but are perceived as all-rounders and are to a large extent responsible for the smooth functioning of operational processes. According to the motto "Just do this as well", **the actual tasks are increasingly being neglected.**

The **solution** is to **automate** routine and recurring mandatory tasks.

POWERSCOUT® helps you to achieve the following goals:

- Avoiding unwanted shutdowns
- Avoiding shutdowns as part of the periodic verification
- Fulfilling documentation obligation
- Visualising leakage and residual currents
- Minimising effort and costs
- Iso, RCMS and ATICS® report
- Automation of your reporting



POWERSCOUT®





POWERSCOUT® features

Automated reports

Reports can be generated from the dashboards. A dashboard can always be sent and saved as a report. There is also an option for managing these reports. In the report management, the publishing intervals as well as the storage in POWERSCOUT® can be set.

- Automated report generation
- Freely configurable time periods
- Storing 250 reports in a history
- Sending reports via e-mail
- Insulation report, residual current report (German Social Accident Insurance Regulation 3 (DGUV V3)) and ATICS® report

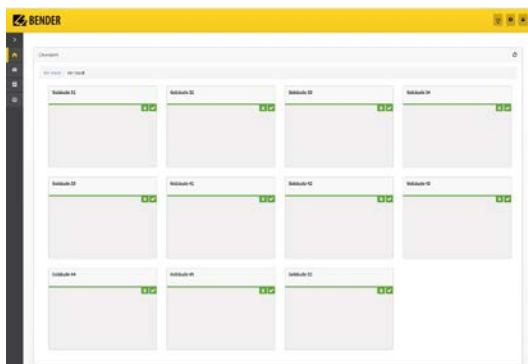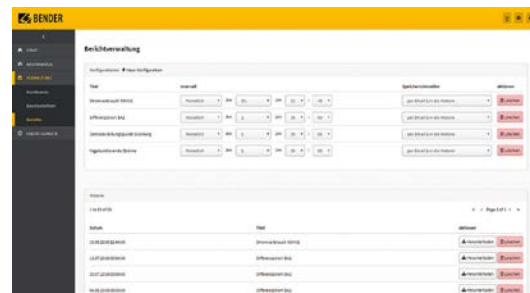

Building and system overview

The installation/system can be displayed by means of freely configurable tiles. As soon as a warning or an alarm (residual current exceeded, insulation fault, upcoming test) occurs in one of the configured parts, it automatically appears on the screen.

- Individual design of buildings, floors and rooms or entire plants
- Navigation to the fault source
- Link to detailed view (dashboard) is possible
- Number of events of the last 28 days can be displayed
- Events and incidents in the system can be counted
- Identification of problematic system parts

Individual appearance

- Logo freely selectable
- Colour setting to match your corporate design (CD)
- Login page can be integrated in your homepage



Configurable dashboards

Dashboards can be used to visualise stored measured values and events. The contents can be structured using configurable widgets.

Among other things, time periods and different statistical values can be set. The dashboard can be easily and individually configured using drag and drop.



Additional settings are available in the dashboard management, e.g. publishing for other users.

- Configurable dashboards
 - Display of:
 - Charging current
 - Residual currents (DC/RMS)
 - Utilisation
 - ...
 - Comprehensive view by means of configurable widgets
 - Sharing dashboards with other users
 - Regular generation of PDF files + forwarding by e-mail
 - Long-term archiving of the data

POWERSCOUT® features

User management

- Management of users
- Different user rights
- Restricted views

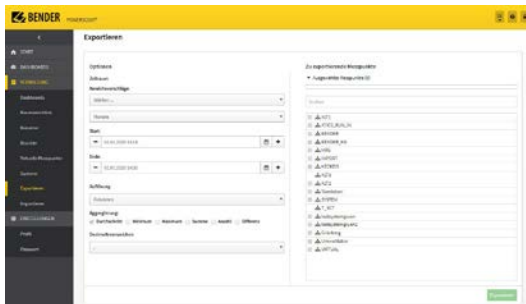
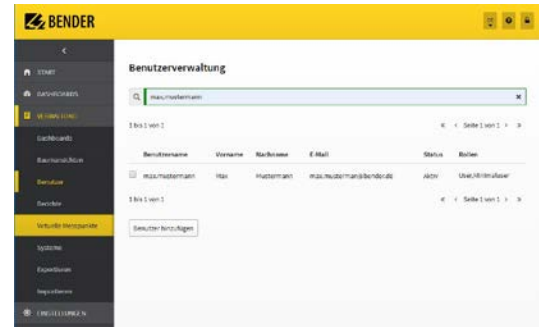


Data import and export

Data access from anywhere

Web-based application

- You can get started immediately after receiving the login details. Your gateway (COM465, CP9xx) sends the measured values to our data centre in encrypted form.
- You will receive automatic updates (security and features).
- We take care of the backups.

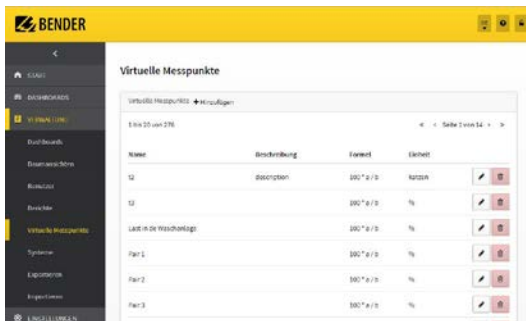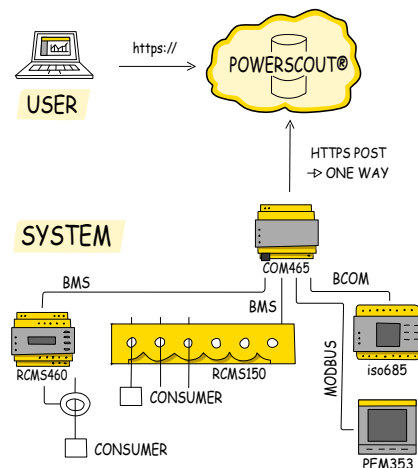

Calculation of key figures

POWERSCOUT® collects data and information across locations. This data can be compiled for fault analysis or calculation of key figures.

- Calculation of data points/measuring points
- Display of virtual measuring points on the dashboard
- Individual naming of virtual measuring points

Bender support

POWERSCOUT® continuously collects measurements and generates user-specific reports. This well-founded database allows representing real trend curves and finding the causes of malfunctions.

Bender supports you in setting up your system. Please do not hesitate to contact us.



POWERSCOUT® widgets – Configuration options

Widgets are graphical components that allow individual adjustment of the content displayed in POWERSCOUT®. The widgets can be displayed in individual sizes and positions on a dashboard.

A dashboard can show a time period. The widgets displayed on the dashboard can differ from the set dashboard time and show individual time periods.

Graph

- Linear and logarithmic representation
 - Insulation values can be displayed more clearly
- Scrolling and zooming with the mouse wheel is possible
- Display of events
- Minimum and maximum of the Y axis adjustable
- Two Y axes
- Line colour selection
- Adjustable line width
- Guides can be displayed



Empfehlungen						Mehrere Jahre (3.3.2016 - 17.3.2016)
Suchen						
Anzahl der Empfehlungen	Erreichte	Wissensbankname	Typ	Status	System	Seitenanzahl
1	Differenzieren	Paar 2 (Paar 2) - Abgleich 10/2	Vermutung	Begruen	Gründung	1
1	Differenzieren	Paar 2 (Paar 2) - Abgleich 10/2	Vermutung	Ende	Gründung	1
1	Differenzieren	Paar 2 (Paar 2) - Abgleich 10/2	Vermutung	Begruen	Gründung	1
1	Differenzieren	Paar 2 (Paar 2) - Abgleich 10/2	Vermutung	Ende	Gründung	1

Event statistics

- Documentation of events
- State display of channels
- Start and end of events
- Tabular view
- Targeted search for events

Event log

- Documentation of events
- State display of channels
- Start and end of events
- Tabular view
- Targeted search for events

Eintragserstellung		Läuf Nr. Page 3 von 12 - 23.12.2019 - 23.12.2019				
Suchen						
3 bis 10 von 169		◀ Seite 1 von 19 ▶				
Datum *	Eintrag	Type	Status	Wasserrate	Wassergabedatum	
30.12.2019 04:30:12	Offeneressourcen	Warnung	Beginn	140 m³	F.02.10.02.ET-WA01.3-Wasserrate 104 Netzunterföhrung	
30.12.2019 04:30:13	Offeneressourcen	Warnung	Beginn	163 m³	F.03.10.02.ET-WA01.3-Wasserrate 1113 Unterföhrung 3.1-17113	
30.12.2019 04:30:26	Offeneressourcen	Warnung	Ende	—	F.03.10.02.ET-WA01.3-Wasserrate 104 Netzunterföhrung	
30.12.2019 04:30:26	Offeneressourcen	Warnung	Ende	—	F.03.10.02.ET-WA01.3-Wasserrate 1113 Unterföhrung 3.1-17113	
30.12.2019 04:30:41	Offeneressourcen	Warnung	Beginn	139 m³	F.03.10.02.ET-WA01.3-Wasserrate 104 Netzunterföhrung	
30.12.2019 04:30:51	Offeneressourcen	Warnung	Ende	—	F.03.10.02.ET-WA01.3-Wasserrate 104 Netzunterföhrung	
30.12.2019 04:30:59	Offeneressourcen	Warnung	Beginn	140 m³	F.03.10.02.ET-WA01.3-Wasserrate 104 Netzunterföhrung	
30.12.2019 04:30:59	Offeneressourcen	Warnung	Beginn	136 m³	F.03.10.02.ET-WA01.3-Wasserrate 1113 Unterföhrung 3.1-17113	
30.12.2019 04:36:05	Offeneressourcen	Warnung	Ende	—	F.03.10.02.ET-WA01.3-Wasserrate 104 Netzunterföhrung	
30.12.2019 04:36:05	Offeneressourcen	Warnung	Ende	—	F.03.10.02.ET-WA01.3-Wasserrate 1113 Unterföhrung 3.1-17113	
3 bis 10 von 169		◀ Seite 1 von 19 ▶				

Atics   		
Messpunktname	Beschreibung	Status
ZS.31.11.001_UNV002_ATICs_Ausfall Leitung 1 ZS	Ereignisse	
ZS.31.11.001_UNV002_ATICs_Ausfall Leitung 2 S1	Ausfall Leitung SV	
ZS.31.11.001_UNV002_ATICs_Isolationsfehler	Ereignisse	
ZS.31.11.001_UNV002_ATICs_Trafo-Überlast	Ereignisse	
ZS.31.11.001_UNV002_ATICs_Trafo-Übertemperatur	Ereignisse	
ZS.31.11.001_UNV002_ATICs_Überstrom	Ereignisse	
ZS.31.11.001_UNV002_ATICs_Test/Service	Ereignisse	
ZS.31.11.001_UNV002_ATICs_Umschalt Einrichtung im Handbetrieb	Automatikbetrieb	
ZS.31.11.001_UNV002_ATICs_Alarm	Automatikbetrieb	


Alarm state

- Display of alarm states
- Fault detection at a glance
- Monitoring of the service state of your system
- Easy detection of residual currents across system parts

POWERSCOUT® widgets – Configuration options

Gauge

- Lower and upper limit values flexibly adjustable
- Monitoring of measured values

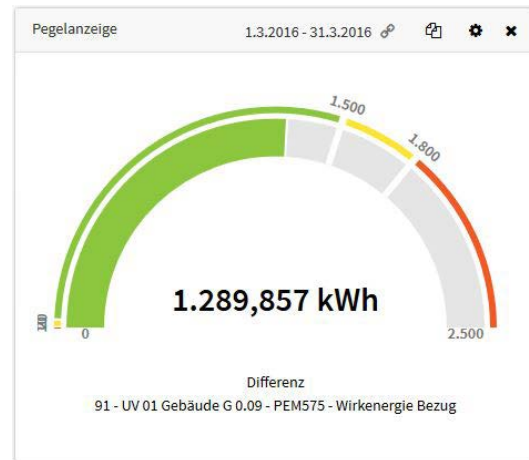

Bar graph

- Display of cumulative meter values in a bar graph
- Grouping of data in ascending order
- Aggregation by days, weeks, months, quarters and years
- Guides can be displayed

Table view



- Display of measured values in a table
- Minimum, maximum and average values can be displayed
- Complete overview of minimum, maximum and average values of several measured values

Tabellenansicht			
Aktuelles Jahr (1.1.2016 - 17.8.2016)			
Messpunktname	Durchschnitt	Minimum	Maximum
Grünberg-1-126-Frequenz	50 Hz	0 Hz	50,107 Hz
Grünberg-1-126-I(1)	36,899 A	81,438 mA	199,807 A
Grünberg-1-126-I(2)	59,96 A	98,143 mA	335,544 A
Grünberg-1-126-I(3)	59,086 A	0 A	314,869 A
Grünberg-1-126-I(N)	66,668 mA	28,766 mA	164,241 mA
Grünberg-1-126-P (1)	8,158 kW	-6,792 kW	43,502 kW
Grünberg-1-126-P (2)	11,232 kW	-14,956 kW	72,787 kW
Grünberg-1-126-P (3)	11,627 kW	-14,065 kW	68,871 kW
Grünberg-1-126-U(1-N)	228,419 V	220,636 V	234,952 V
Grünberg-1-126-U(2-N)	228,665 V	220,833 V	236,297 V
Grünberg-1-126-U(3-N)	228,685 V	221,342 V	236,053 V

POWERSCOUT® widgets – Configuration options

Text editor

- Description of dashboards
- Adding custom images

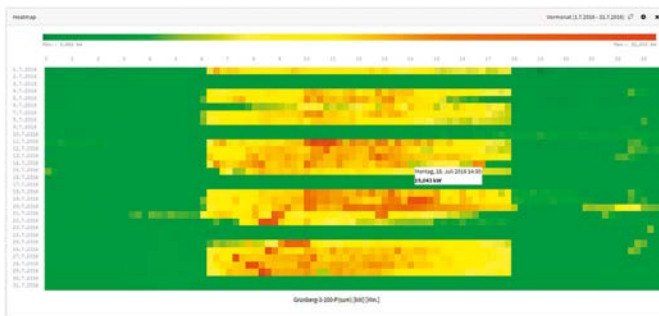
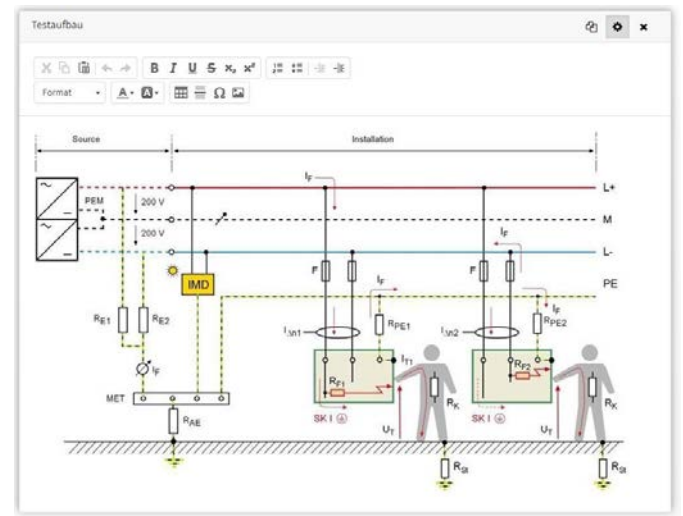


Heat map

- Display particularly striking values in an easily recognisable way
- Colour inversion to allow insulation faults to be displayed as well
- Adjustable limit values

Sankey diagram

- Graphic representation of quantity flows
- Preferably used for energy monitoring
- System view freely configurable

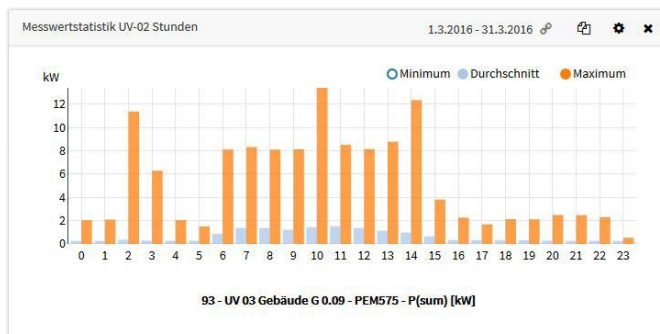
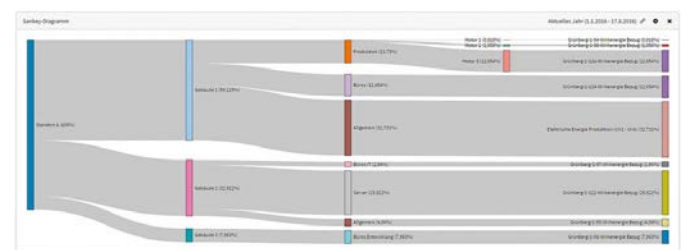


Measurement statistics

- Display of a measured value as statistics
- Minimum, maximum and average values can be displayed
- Colour differentiation individually adjustable
- Guides can be displayed

The Bender world in a nutshell

Bender system world

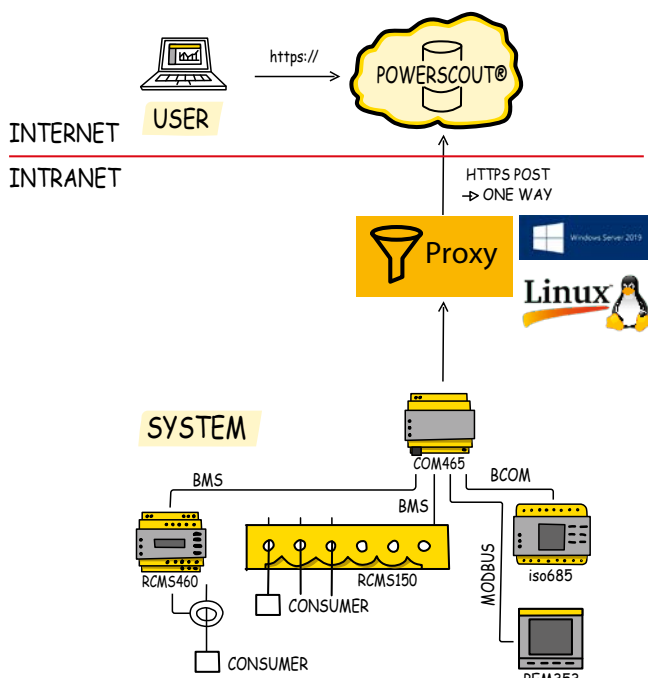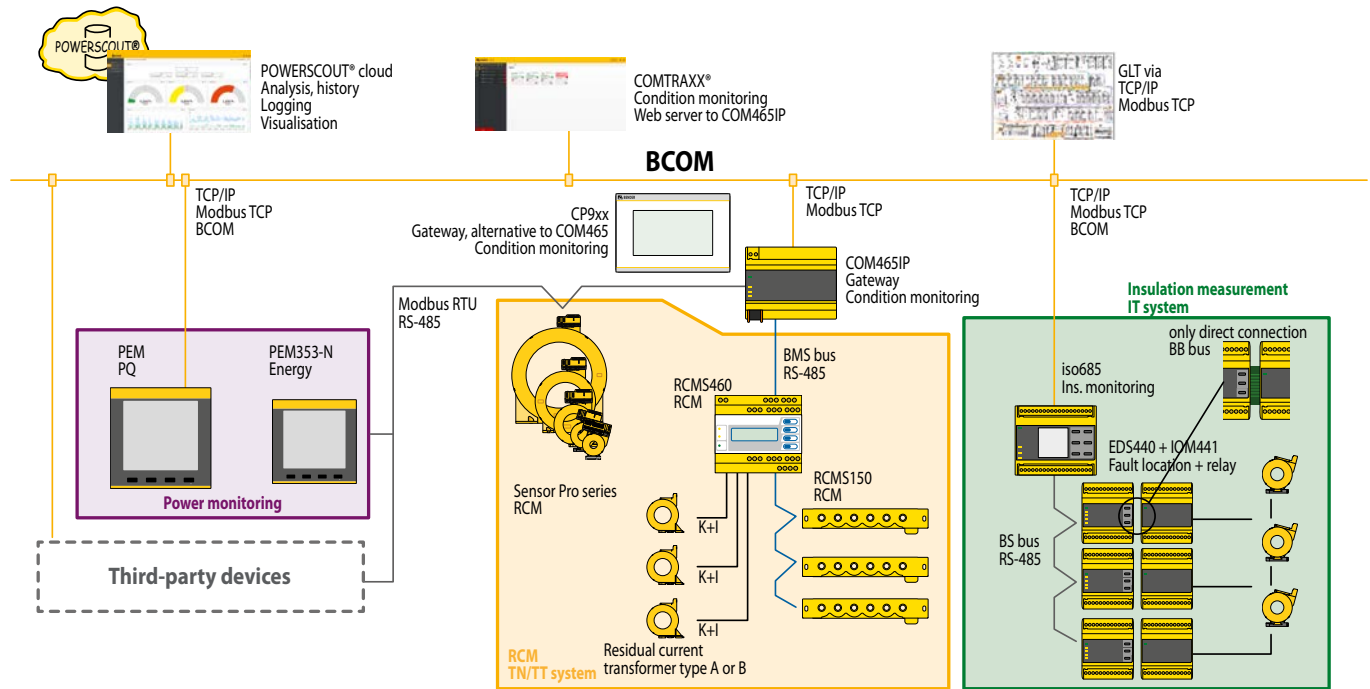

Considerably less effort:

- The initial and ongoing project costs caused by in-house IT infrastructure are often overlooked
- No updates at the customer's site or by the customer
- No maintenance by the customer necessary
- No database maintenance by the customer necessary
- Hardware costs, memory expansions are not relevant
- Updates and new features are incorporated on the fly
- Access from any location without VPN etc.
- One-way data flow
- On request, communication via proxy server (simple installation)
- Data protection in professional data centres is better than in some companies
- Data backup constantly guaranteed, redundancy
- Hosted by a German company, server in Frankfurt



Bender GmbH & Co. KG

Londorfer Straße 65 • 35305 Grünberg • Germany
Tel.: +49 6401 807-0 • info@bender.de • www.bender.de



BENDER Group

Contact Information



Solutions for industries
and automation

Quad Industry GmbH

Barmer Str. 62a, 42899, Remscheid,
Germany

Tel: +49 (30) 994-04-988

Fax: +49 (30) 994-04-987

Mail: sales@quad-instruments.com
services@quad-instruments.com



www.quad-instruments.com/contacts



www.quad-instruments.com/services

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

© Copyright 2018 ABB.

All rights reserved.