

RK170

Measuring converter





Measuring converter RK170

Device features

- Plastic enclosure for DIN rail mounting
- Zero setting 0 or 4 mA
- Electrical separation between the input and output signal

Product description

The measuring transducer RK170 is designed to convert current signals of measuring instrument outputs of ISOMETER®s (0...400 μ A) and residual current monitors (RCM, RCMA) into standard current signals 0(4)...20 mA or into voltage signals (0...10 V). These currents and voltages are usually required in process technology.

Application

- Conversion of DC 0...400 μ A current signals into 0(4)...20 mA or 0...10 V signals
- For ISOMETER®s and RCM and RCMA residual current monitors with measurement instrument output DC 0...400 μ A



RK170 adjustments

The signals at the outputs 0(4)...20 mA and 0...10 V are simultaneously available and their own nominal load must not be exceeded.


Setting the zero and the full-scale value will have an effect on both outputs. Hence, optimum adjustment is only possible for one output at a time.

The measuring transducer RK170 is factory-set to an input signal of DC 0...400 μ A providing a galvanically isolated output signal of 0...20 mA or 0...10 V. When an output signal of 4...20 mA is required or the measuring transducer RK170 is to be adjusted for other reasons, the adjustment can be carried out using the trimmers "Zero" and "Scale".

Characteristic curve

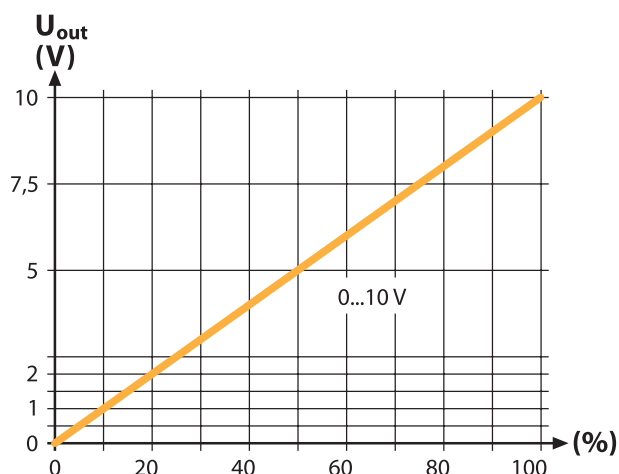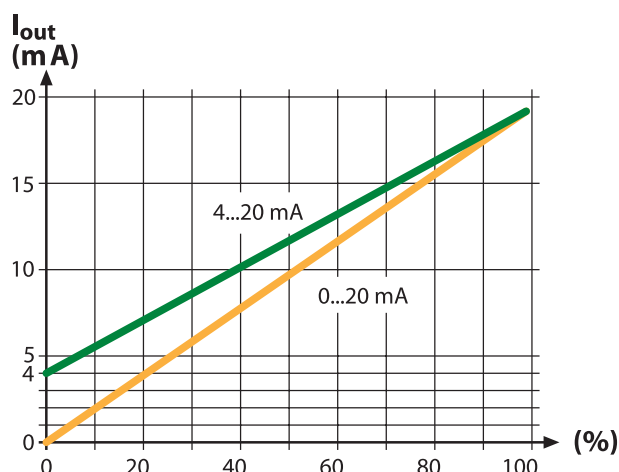

Wiring diagram

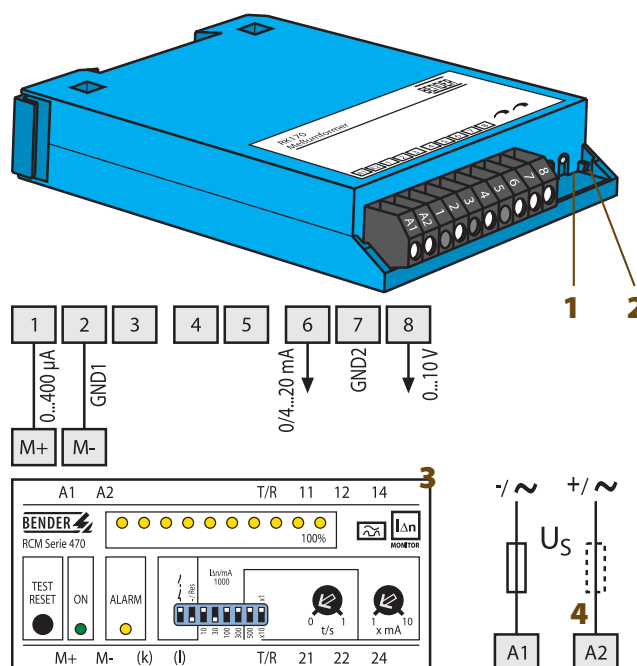

- 1 - Zero: zero setting
- 2 - Scale: full-scale value calibration
- 3 - RCM series device
- 4 - U_S see nameplate, 2 A slow-blow fuse recommended

Technical data

Voltage ranges

Supply voltage U_S	DC 20...297 V/AC 19...264 V
Frequency range U_S	50...120 Hz
Power consumption	≤ 3 VA

Inputs

Current input	DC 0...400 μ A
Max. permissible current	DC 4 mA
Rated input resistance	approx. 2.5 k Ω

Outputs

Outputs	two outputs with common ground
Voltage output	DC 0...10 V
Open-circuit voltage	DC 12 V
Rated burden	1 k Ω
Current output	DC 0/4...20 mA
Short-circuit current	$\leq$ DC 50 mA short-circuit proof
Rated burden	500 Ω
Accuracy at $T_U = 23$ °C	class 0.5
Temperature coefficient	0.025 %/°C
Rated rise time T 0.9	50 ms
Dielectric strength input/output/supply	AC 2500 V

Environment

Shock resistance IEC 60068-2-27 (device in operation)	5 g/11 ms
Vibration resistance IEC 60068-2-6 (device in operation)	1 g/10...150 Hz
Vibration resistance IEC 60068-2-6 (transport)	2 g/10...150 Hz
Ambient temperature (during operation)	0...+50 °C
Ambient temperature (during storage)	-20...+70 °C
Climatic class acc. to IEC 60721-3-3	3K3

Connection

Connection type	modular terminals
Connection properties rigid/flexible	0.5...2.5 mm ² /0.14...1.5 mm ²

Other

Operating mode	continuous operation
Mounting	any position
Degree of protection, internal components (IEC 60529)	IP40
Degree of protection, internal components (IEC 60529)	IP20
Dimensions	75 x 22.5 x 110 mm
DIN rail mounting acc. to	IEC 60715
Flammability class	UL94 V-2
Operating manual	BP109006
Weight	≤ 200 g


Ordering information

Supply voltage ¹⁾ U_S		Type	Art. No.
AC	DC		
19...264 V	20...297 V	RK170	B 9804 1500

¹⁾ Absolute values

Type of enclosure/dimension diagram

Dimensions in mm

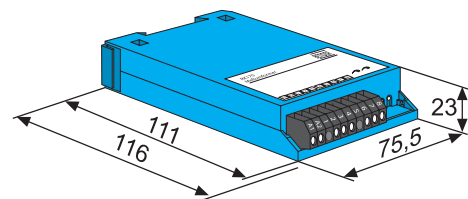



Bender GmbH & Co. KG

P.O. Box 1161 • 35301 Grünberg • Germany

Londorfer Straße 65 • 35305 Grünberg • Germany

Tel.: +49 6401 807-0 • Fax: +49 6401 807-259

E-Mail: info@bender-de.com • www.bender-de.com

BENDER Group

Contact Information



Solutions for industries
and automation

Quad Industry GmbH

Barmer Str. 62a, 42899, Remscheid,
Germany

Tel: +49 (30) 994-04-988

Fax: +49 (30) 994-04-987

Mail: sales@quad-instruments.com
services@quad-instruments.com



www.quad-instruments.com/contacts



www.quad-instruments.com/services

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

© Copyright 2018 ABB.

All rights reserved.